
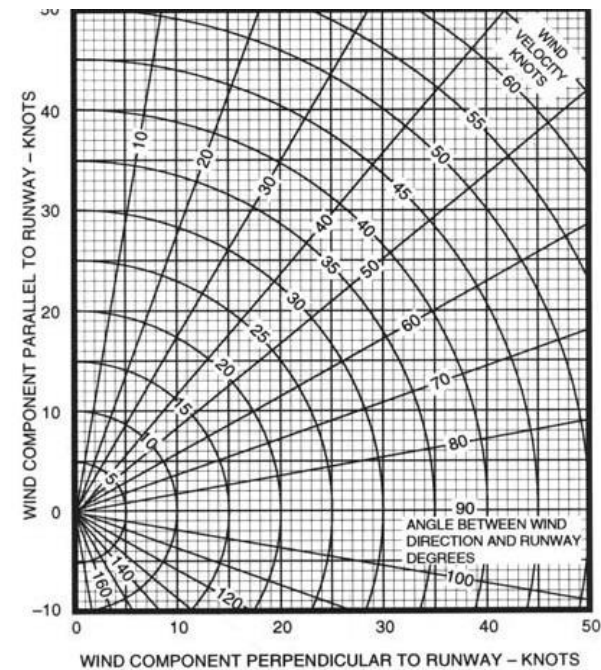


WEATHER			
LOCATION	METAR/ASOS/AWOS OR ATIS INFORMATION:		
RUNWAY:	HEADWIND:	CROSSWIND:	
RUNWAY:	HEADWIND:	CROSSWIND:	
PRESSURE ALT	FT	DENSITY ALT	FT
WINDS ALOFT	FT	9000FT	12000FT
DIR/SPD/TEMP			

A/C ID:	WEIGHT	ARM	MOMENT
BASIC EMPTY WEIGHT			
PILOT/FRONT PASSENGER			
REAR PASSENGERS			
BAGGAGE AREA 1			
BAGGAGE AREA 2			
FUEL (____ GAL.)			
RAMP		CG	
START UP, TAXI, RUN-UP	-		-
TAKE OFF		CG	
EST. FUEL BURN (____ GAL)	-		-

PERFORMANCE				
TAKE OFF DATA	Pressure Alt	Temp	Ground Roll	50FT Obstacle
	FT	C	FT	FT
CLIMB	Vx:		Vy: FPM:	
	FT		FT	
CRUISE	RPM	M.P.	TAS	GPH
	FT			
LANDING DATA	Pressure Alt	Temp	50FT Obstacle	Ground Roll
	FT	C	FT	FT

NOTAMS	

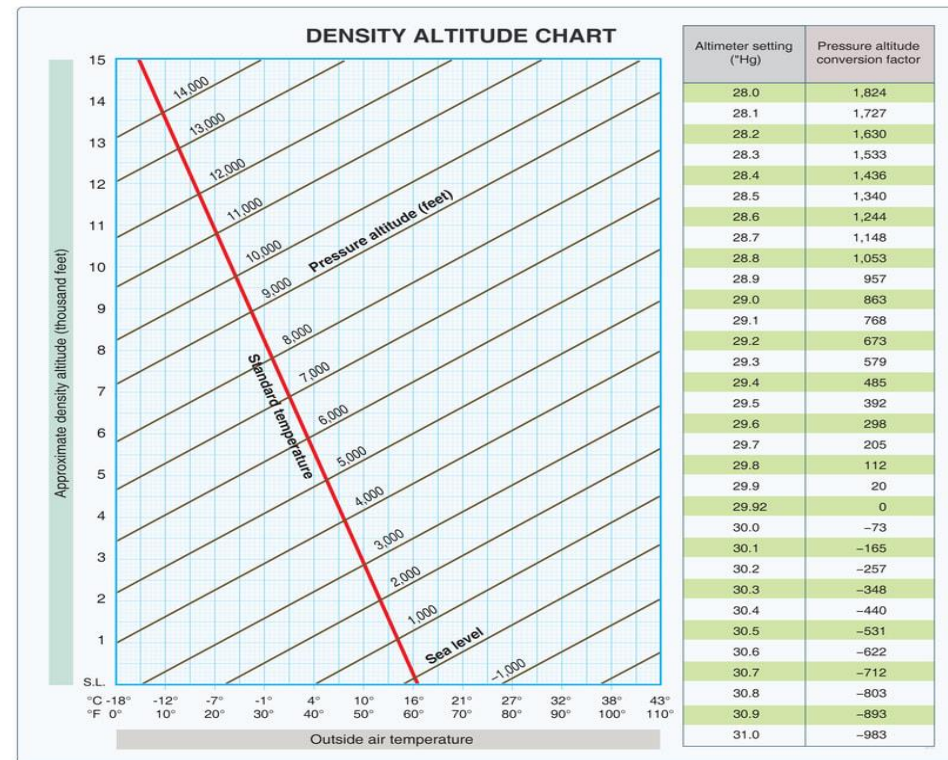

Airworthiness Checklist / TOLD

Pilot _____ Date _____

N-Number _____ Pilot Signature _____



Pilot		X
Documents	Government Issue Photo ID	
	Pilot Certificate	
	Logbook+ Endorsements	
	Medical	
Physiological	I.M.S.A.F.E.	
Preflight action 91.103 N.W.K.R.A.F.T. Each pilot in command shall, before beginning a flight, become familiar with all available information concerning that flight	NOTAMS	
	Weather	
	Known ATC Delays/Frequencies	
	Runways	
	Alternates	
	Fuel Requirements REQ/REGs/P-MINs	
	Take-Off and Landing Data	

Aircraft Documents				X
A		Airworthiness Certificate		
R		Registration Certificate		
R		Radio Station License		
O		Operating Handbook		
W		Weight and Balance		
C		Compass Deviation Card		
Required Aircraft Inspections				X
			DATE or TACH	NEXT DUE
V F R	A	Annual (12 CAL.)		
	H	Hundred Hour (100HR)		
	E	ELT INSPECTION (12CAL.)		
		ELT HALF LIFE/USE		
	A	Airworthiness Directives		
T	Transponder (24 CAL.)			
I F R	P	Pitot Static System -24 Cal		
	A	Altimeter (24 CAL.)		
	V	VOR Equipment Check (30DAYS)		

Required Aircraft Equipment 91.205(b)			X	
DAY				
V F R	A	Anti-Collision Light System		
	T	Tachometer		
	O	Oil Pressure Gauge		
	M	Manifold Pressure (Altitude Engine)		
	A	Airspeed Indicator		
	T	Temp Gauge (Liquid Cooled Engine)		
	O	Oil Temperature Gauge (Air-Cooled Engine)		
	F	Fuel Quantity Indicator		
	L	Landing Gear Position Indicator (RG A/C)		
	A	Altimeter		
	M	Magnetic Compass		
	E	ELT		
	S	Safety Belts		
	NIGHT			
	F	Fuses' (3 Per kind per fuse)		
L	Landing Light			
A	Anti-Collision Lights			
P	Position Indicator Lights			
S	Source of Electricity			
Required Equipment 91.205(b)			X	
I F R	ALL DAY AND NIGHT VFR			
	G	Generator or Alternator		
	R	Rate of Turn Indicator		
	A	Attitude Indicator		
	B	Ball (Slip/Skid Indicator)		
	C	Clock with second sweep or read		
	A	Altimeter (Pressure Sensitive)		
	R	Radio Equipment		
	D	Directional Gyro		
	D	DME Above FL250 and using VOR's		